


C126

Slot Drill

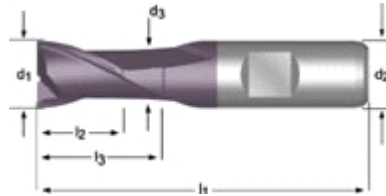

d ₁ R mm	d ₂ R _{h6} mm	l ₂ mm	l ₁ mm	z	l ₃ mm	d ₃ R mm	e-code		
1.00	6	2.5	47	2	-	-	C1261.0		
1.50	6	3	47	2	-	-	C1261.5		
2.00	6	4	48	2	-	-	C1262.0		
2.50	6	5	49	2	-	-	C1262.5		
3.00	6	5	49	2	-	-	C1263.0		
3.50	6	6	50	2	-	-	C1263.5		
4.00	6	7	51	2	-	-	C1264.0		
4.50	6	7	51	2	-	-	C1264.5		
5.00	6	8	52	2	-	-	C1265.0		
5.50	6	8	52	2	-	-	C1265.5		
6.00	6	8	52	2	-	-	C1266.0		
6.50	10	10	60	2	-	-	C1266.5		
7.00	10	10	60	2	-	-	C1267.0		
7.50	10	10	60	2	-	-	C1267.5		
8.00	10	11	61	2	-	-	C1268.0		
8.50	10	11	61	2	-	-	C1268.5		
9.00	10	11	61	2	-	-	C1269.0		
9.50	10	11	61	2	-	-	C1269.5		
10.00	10	13	63	2	22.5	9.5	C12610.0		
10.50	12	13	70	2	-	-	C12610.5		
11.00	12	13	70	2	-	-	C12611.0		
11.50	12	13	70	2	-	-	C12611.5		
12.00	12	16	73	2	27.5	11.5	C12612.0		
12.50	12	16	73	2	27.5	11.5	C12612.5		
13.00	12	16	73	2	27.5	11.5	C12613.0		
14.00	12	16	73	2	27.5	11.5	C12614.0		
15.00	12	16	73	2	27.5	11.5	C12615.0		

d ₁ R mm	d ₂ R _{h6} mm	l ₂ mm	l ₁ mm	z	l ₃ mm	d ₃ R mm	e-code		
16.00	16	19	79	2	30.5	15.5	C12616.0		
18.00	16	19	79	2	30.5	15.5	C12618.0		
20.00	20	22	88	2	37.5	19.5	C12620.0		
22.00	20	22	88	2	37.5	19.5	C12622.0		
24.00	25	26	102	2	45.5	23.5	C12624.0		
25.00	25	26	102	2	45.5	24.5	C12625.0		
30.00	25	26	102	2	45.5	24.5	C12630.0		

¹⁾diameter tolerance h10

²⁾slot not in P9 tolerance