


R454

Force X Drill 5×D

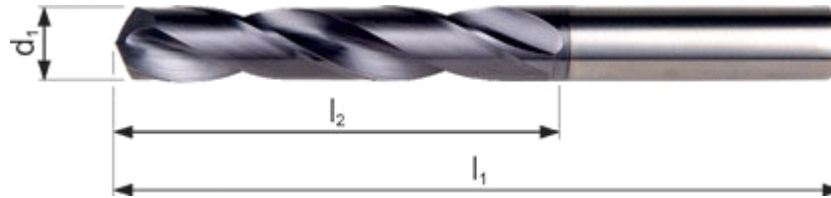

d_1 R Inch	d_1 R _{m7} mm	d_1 decimal Inch	l_2 mm	l_1 mm	l_3 mm	d_2 R _{h6} mm	e-code	GBP
	3.00	0.1181	28	66	36	6	R4543.0	30,90
	3.10	0.1220	28	66	36	6	R4543.1	30,90
1/8	3.18	0.1250	28	66	36	6	R4541/8	30,90
	3.20	0.1260	28	66	36	6	R4543.2	30,90
30	3.26	0.1283	28	66	36	6	R454N30	30,90
	3.30	0.1299	28	66	36	6	R4543.3	30,90
	3.40	0.1339	28	66	36	6	R4543.4	30,90
29	3.45	0.1360	28	66	36	6	R454N29	30,90
	3.50	0.1378	28	66	36	6	R4543.5	30,90
28	3.57	0.1406	28	66	36	6	R454N28	30,90
9/64	3.57	0.1406	28	66	36	6	R4549/64	30,90
	3.60	0.1417	28	66	36	6	R4543.6	30,90
27	3.66	0.1441	28	66	36	6	R454N27	30,90
	3.70	0.1457	28	66	36	6	R4543.7	30,90
26	3.73	0.1469	36	74	36	6	R454N26	30,90
25	3.80	0.1496	36	74	36	6	R454N25	30,90
	3.80	0.1496	36	74	36	6	R4543.8	30,90
24	3.86	0.1520	36	74	36	6	R454N24	30,90
	3.90	0.1535	36	74	36	6	R4543.9	30,90
23	3.91	0.1539	36	74	36	6	R454N23	30,90
5/32	3.97	0.1563	36	74	36	6	R4545/32	30,90
22	3.99	0.1571	36	74	36	6	R454N22	30,90
	4.00	0.1575	36	74	36	6	R4544.0	30,90
21	4.04	0.1591	36	74	36	6	R454N21	31,85
20	4.09	0.1610	36	74	36	6	R454N20	31,85
	4.10	0.1614	36	74	36	6	R4544.1	31,85

d ₁ R Inch	d ₁ Rm ₇ mm	d ₁ decimal Inch	l ₂ mm	l ₁ mm	l ₃ mm	d ₂ Rh ₆ mm	e-code	GBP
	4.20	0.1654	36	74	36	6	R4544.2	31,85
19	4.22	0.1661	36	74	36	6	R454N19	31,85
	4.30	0.1693	36	74	36	6	R4544.3	31,85
18	4.31	0.1697	36	74	36	6	R454N18	31,85
11/64	4.37	0.1719	36	74	36	6	R45411/64	31,85
17	4.39	0.1728	36	74	36	6	R454N17	31,85
	4.40	0.1732	36	74	36	6	R4544.4	31,85
	4.50	0.1772	36	74	36	6	R4544.5	31,85
16	4.50	0.1772	36	74	36	6	R454N16	31,85
15	4.57	0.1799	36	74	36	6	R454N15	31,85
	4.60	0.1811	36	74	36	6	R4544.6	31,85
14	4.62	0.1819	36	74	36	6	R454N14	31,85
13	4.70	0.1850	36	74	36	6	R454N13	31,85
	4.70	0.1850	36	74	36	6	R4544.7	31,85
3/16	4.76	0.1875	44	82	36	6	R4543/16	31,85
12	4.80	0.1890	44	82	36	6	R454N12	31,85
	4.80	0.1890	44	82	36	6	R4544.8	31,85
11	4.85	0.1909	44	82	36	6	R454N11	31,85
	4.90	0.1929	44	82	36	6	R4544.9	31,85
10	4.92	0.1937	44	82	36	6	R454N10	31,85
9	4.98	0.1961	44	82	36	6	R454N9	31,85
	5.00	0.1969	44	82	36	6	R4545.0	31,85
8	5.06	0.1992	44	82	36	6	R454N8	31,85
	5.10	0.2008	44	82	36	6	R4545.1	31,85
7	5.11	0.2010	44	82	36	6	R454N7	31,85
13/64	5.16	0.2031	44	82	36	6	R45413/64	31,85
6	5.18	0.2039	44	82	36	6	R454N6	31,85
	5.20	0.2047	44	82	36	6	R4545.2	31,85
5	5.22	0.2055	44	82	36	6	R454N5	31,85
4	5.31	0.2091	44	82	36	6	R454N4	31,85
3	5.41	0.2130	44	82	36	6	R454N3	31,85
	5.50	0.2165	44	82	36	6	R4545.5	31,85
7/32	5.56	0.2188	44	82	36	6	R4547/32	31,85
	5.60	0.2205	44	82	36	6	R4545.6	31,85
2	5.61	0.2209	44	82	36	6	R454N2	31,85
	5.70	0.2244	44	82	36	6	R4545.7	31,85
1	5.79	0.2280	44	82	36	6	R454N1	31,85
	5.80	0.2283	44	82	36	6	R4545.8	31,85
A	5.94	0.2339	44	82	36	6	R454A	31,85
15/64	5.95	0.2344	44	82	36	6	R45415/64	31,85
	6.00	0.2362	44	82	36	6	R4546.0	31,85
B	6.05	0.2380	53	91	36	8	R454B	36,65
	6.10	0.2402	53	91	36	8	R4546.1	36,65
C	6.15	0.2421	53	91	36	8	R454C	36,65
	6.20	0.2441	53	91	36	8	R4546.2	36,65
D	6.25	0.2461	53	91	36	8	R454D	36,65

d ₁ R Inch	d ₁ Rm ₇ mm	d ₁ decimal Inch	l ₂ mm	l ₁ mm	l ₃ mm	d ₂ Rh ₆ mm	e-code	GBP
	6.30	0.2480	53	91	36	8	R4546.3	36,65
1/4	6.35	0.2500	53	91	36	8	R4541/4	36,65
E	6.35	0.2500	53	91	36	8	R454E	36,65
	6.40	0.2520	53	91	36	8	R4546.4	36,65
	6.50	0.2559	53	91	36	8	R4546.5	36,65
F	6.53	0.2571	53	91	36	8	R454F	36,65
	6.60	0.2598	53	91	36	8	R4546.6	36,65
G	6.63	0.2610	53	91	36	8	R454G	36,65
	6.70	0.2638	53	91	36	8	R4546.7	36,65
17/64	6.75	0.2656	53	91	36	8	R45417/64	36,65
H	6.76	0.2661	53	91	36	8	R454H	36,65
	6.80	0.2677	53	91	36	8	R4546.8	36,65
	6.90	0.2717	53	91	36	8	R4546.9	36,65
I	6.91	0.2720	53	91	36	8	R454I	36,65
	7.00	0.2756	53	91	36	8	R4547.0	36,65
J	7.04	0.2772	53	91	36	8	R454J	36,65
	7.10	0.2795	53	91	36	8	R4547.1	36,65
K	7.14	0.2811	53	91	36	8	R454K	36,65
9/32	7.14	0.2813	53	91	36	8	R4549/32	36,65
	7.30	0.2874	53	91	36	8	R4547.3	36,65
L	7.37	0.2902	53	91	36	8	R454L	36,65
	7.40	0.2913	53	91	36	8	R4547.4	36,65
M	7.49	0.2949	53	91	36	8	R454M	36,65
	7.50	0.2953	53	91	36	8	R4547.5	36,65
19/64	7.54	0.2969	53	91	36	8	R45419/64	36,65
	7.60	0.2992	53	91	36	8	R4547.6	36,65
N	7.67	0.3020	53	91	36	8	R454N	36,65
	7.70	0.3031	53	91	36	8	R4547.7	36,65
	7.80	0.3071	53	91	36	8	R4547.8	36,65
	7.90	0.3110	53	91	36	8	R4547.9	36,65
5/16	7.94	0.3125	53	91	36	8	R4545/16	36,65
	8.00	0.3150	53	91	36	8	R4548.0	36,65
O	8.03	0.3161	61	103	40	10	R454O	41,40
	8.10	0.3189	61	103	40	10	R4548.1	41,40
	8.20	0.3228	61	103	40	10	R4548.2	41,40
P	8.20	0.3228	61	103	40	10	R454P	41,40
21/64	8.33	0.3281	61	103	40	10	R45421/64	41,40
	8.40	0.3307	61	103	40	10	R4548.4	41,40
Q	8.43	0.3319	61	103	40	10	R454Q	41,40
	8.50	0.3346	61	103	40	10	R4548.5	41,40
	8.60	0.3386	61	103	40	10	R4548.6	41,40
R	8.61	0.3390	61	103	40	10	R454R	41,40
	8.70	0.3425	61	103	40	10	R4548.7	41,40
11/32	8.73	0.3438	61	103	40	10	R45411/32	41,40
	8.80	0.3465	61	103	40	10	R4548.8	41,40
S	8.84	0.3480	61	103	40	10	R454S	41,40

d ₁ R Inch	d ₁ R _{m7} mm	d ₁ decimal Inch	l ₂ mm	l ₁ mm	l ₃ mm	d ₂ R _{h6} mm	e-code	GBP
	8.90	0.3504	61	103	40	10	R4548.9	41,40
	9.00	0.3543	61	103	40	10	R4549.0	41,40
T	9.09	0.3579	61	103	40	10	R454T	41,40
	9.10	0.3583	61	103	40	10	R4549.1	41,40
23/64	9.13	0.3594	61	103	40	10	R45423/64	41,40
	9.30	0.3661	61	103	40	10	R4549.3	41,40
U	9.35	0.3681	61	103	40	10	R454U	41,40
	9.40	0.3701	61	103	40	10	R4549.4	41,40
	9.50	0.3740	61	103	40	10	R4549.5	41,40
3/8	9.53	0.3750	61	103	40	10	R4543/8	41,40
V	9.58	0.3772	61	103	40	10	R454V	41,40
	9.60	0.3780	61	103	40	10	R4549.6	41,40
	9.70	0.3819	61	103	40	10	R4549.7	41,40
	9.80	0.3858	61	103	40	10	R4549.8	41,40
	9.90	0.3898	61	103	40	10	R4549.9	41,40
W	9.80	0.3858	61	103	40	10	R454W	41,40
25/64	9.92	0.3906	61	103	40	10	R45425/64	41,40
	10.00	0.3937	61	103	40	10	R45410.0	41,40
X	10.08	0.3969	70	118	45	12	R454X	60,10
	10.10	0.3976	70	118	45	12	R45410.1	60,10
	10.20	0.4016	70	118	45	12	R45410.2	60,10
Y	10.26	0.4039	70	118	45	12	R454Y	60,10
	10.30	0.4055	70	118	45	12	R45410.3	60,10
13/32	10.32	0.4063	70	118	45	12	R45413/32	60,10
	10.40	0.4094	70	118	45	12	R45410.4	60,10
Z	10.49	0.4130	70	118	45	12	R454Z	60,10
	10.50	0.4134	70	118	45	12	R45410.5	60,10
	10.60	0.4173	70	118	45	12	R45410.6	60,10
27/64	10.72	0.4219	70	118	45	12	R45427/64	60,10
	11.00	0.4331	70	118	45	12	R45411.0	60,10
7/16	11.11	0.4375	70	118	45	12	R4547/16	60,10
	11.20	0.4409	70	118	45	12	R45411.2	60,10
	11.40	0.4488	70	118	45	12	R45411.4	60,10
	11.50	0.4528	70	118	45	12	R45411.5	60,10
29/64	11.51	0.4531	70	118	45	12	R45429/64	60,10
	11.60	0.4567	70	118	45	12	R45411.6	60,10
	11.80	0.4646	70	118	45	12	R45411.8	60,10
15/32	11.91	0.4688	70	118	45	12	R45415/32	60,10
	12.00	0.4724	70	118	45	12	R45412.0	60,10
	12.10	0.4764	76	124	45	14	R45412.1	78,00
	12.20	0.4803	76	124	45	14	R45412.2	78,00
31/64	12.30	0.4844	76	124	45	14	R45431/64	78,00
	12.50	0.4921	76	124	45	14	R45412.5	78,00
	12.70	0.5000	76	124	45	14	R45412.7	78,00
1/2	12.70	0.5000	76	124	45	14	R4541/2	78,00
	12.80	0.5039	76	124	45	14	R45412.8	78,00

d ₁ R Inch	d ₁ R _{m7} mm	d ₁ decimal Inch	l ₂ mm	l ₁ mm	l ₃ mm	d ₂ R _{h6} mm	e-code	GBP
	13.00	0.5118	76	124	45	14	R45413.0	78,00
33/64	13.10	0.5156	76	124	45	14	R45433/64	78,00
17/32	13.49	0.5313	76	124	45	14	R45417/32	78,00
	13.50	0.5315	76	124	45	14	R45413.5	78,00
	13.80	0.5433	76	124	45	14	R45413.8	78,00
35/64	13.89	0.5469	76	124	45	14	R45435/64	78,00
	14.00	0.5512	76	124	45	14	R45414.0	78,00
	14.25	0.5610	82	133	48	16	R45414.25	100,00
9/16	14.29	0.5625	82	133	48	16	R4549/16	100,00
	14.50	0.5709	82	133	48	16	R45414.5	100,00
37/64	14.68	0.5781	82	133	48	16	R45437/64	100,00
	14.80	0.5827	82	133	48	16	R45414.8	100,00
	15.00	0.5906	82	133	48	16	R45415.0	100,00
19/32	15.08	0.5938	82	133	48	16	R45419/32	100,00
	15.10	0.5945	82	133	48	16	R45415.1	100,00
39/64	15.48	0.6094	82	133	48	16	R45439/64	100,00
	15.50	0.6102	82	133	48	16	R45415.5	100,00
	15.80	0.6220	82	133	48	16	R45415.8	100,00
5/8	15.88	0.6250	82	133	48	16	R4545/8	100,00
	16.00	0.6299	82	133	48	16	R45416.0	100,00
41/64	16.27	0.6406	91	143	48	18	R45441/64	158,00
	16.50	0.6496	91	143	48	18	R45416.5	158,00
21/32	16.67	0.6563	91	143	48	18	R45421/32	158,00
	17.00	0.6693	91	143	48	18	R45417.0	158,00
43/64	17.07	0.6720	91	143	48	18	R45443/64	158,00
11/16	17.46	0.6874	91	143	48	18	R45411/16	158,00
	17.50	0.6890	91	143	48	18	R45417.5	158,00
	17.80	0.7008	91	143	48	18	R45417.8	158,00
45/64	17.86	0.7031	91	143	48	18	R45445/64	158,00
	18.00	0.7087	91	143	48	18	R45418.0	158,00
23/32	18.26	0.7189	99	153	50	20	R45423/32	176,00
	18.50	0.7283	99	153	50	20	R45418.5	176,00
47/64	18.65	0.7343	99	153	50	20	R45447/64	176,00
	19.00	0.7480	99	153	50	20	R45419.0	176,00
3/4	19.05	0.7500	99	153	50	20	R4543/4	176,00
	19.50	0.7677	99	153	50	20	R45419.5	176,00
	19.80	0.7795	99	153	50	20	R45419.8	176,00
	20.00	0.7874	99	153	50	20	R45420.0	176,00