



## S802HB

Slot Drill

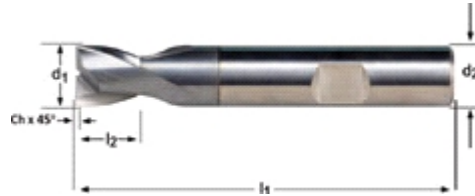

d <sub>1</sub> R mm	Ch ±0.03x45° mm	d <sub>2</sub> R <sub>h6</sub> mm	l <sub>2</sub> mm	l <sub>1</sub> mm	z	e-code	GBP
1.80	-	6	3	50	2	S802HB1.8	43,70
2.00	-	6	3	50	2	S802HB2.0	40,15
2.50	0.08	6	3	50	2	S802HB2.5	42,35
2.80	0.08	6	4	50	2	S802HB2.8	44,60
3.00	0.08	6	4	50	2	S802HB3.0	40,15
3.50	0.08	6	4	50	2	S802HB3.5	44,60
3.80	0.08	6	5	54	2	S802HB3.8	49,05
4.00	0.13	6	5	54	2	S802HB4.0	43,70
4.50	0.13	6	5	54	2	S802HB4.5	49,05
4.80	0.13	6	6	54	2	S802HB4.8	49,05
5.00	0.13	6	6	54	2	S802HB5.0	44,60
5.75	0.13	6	7	54	2	S802HB5.75	49,05
6.00	0.13	6	7	54	2	S802HB6.0	44,60
6.75	0.13	8	8	58	2	S802HB6.75	66,90
7.00	0.13	8	8	58	2	S802HB7.0	66,90
7.75	0.13	8	9	58	2	S802HB7.75	71,40
8.00	0.20	8	9	58	2	S802HB8.0	<sup>1)</sup> 62,40
9.00	0.20	10	10	66	2	S802HB9.0	<sup>1)</sup> 89,20
9.70	0.20	10	11	66	2	S802HB9.7	<sup>1)</sup> 89,20
10.00	0.20	10	11	66	2	S802HB10.0	<sup>1)</sup> 82,50
11.70	0.20	12	12	73	2	S802HB11.7	<sup>1)</sup> 125,00
12.00	0.20	12	12	73	2	S802HB12.0	<sup>1)</sup> 114,00
13.70	0.20	14	14	75	2	S802HB13.7	<sup>1)</sup> 156,00
14.00	0.20	14	14	75	2	S802HB14.0	<sup>1)</sup> 143,00
15.70	0.20	16	16	82	2	S802HB15.7	<sup>1)</sup> 201,00

d <sub>1</sub> R mm	Ch ±0.03x45° mm	d <sub>2</sub> R <sub>h6</sub> mm	l <sub>2</sub> mm	l <sub>1</sub> mm	z	e-code		GBP
16.00	0.20	16	16	82	2	S802HB16.0	1)	187,00
17.70	0.20	18	18	84	2	S802HB17.7	1)	245,00
18.00	0.20	18	18	84	2	S802HB18.0	1)	241,00
19.70	0.30	20	20	92	2	S802HB19.7	1)	334,00
20.00	0.30	20	20	92	2	S802HB20.0	1)	290,00

<sup>1)</sup>Ch ±0.05x45° mm