


For use in heavy-duty applications where hard use is expected for graphite finishing or Kevlar cutting, die polishing, removing welds or foundry work. Almost silent this light tool shows the power and superiority of the governed turbine. The **230DM** tools incorporate heavy duty bearings and have collet capacities of 1/4" or 6mm. The vibration level is only 0.9 mm/s² - minimal. The **230SV** and **230DM** may be fitted to the shop's hose assembly or our air supply assembly with fittings. The **230DM** has a deadman's handle for quick, easy shut-off. The **230SV** is equipped with a hose shut-off valve conveniently located at the top of the tool. These tools will perform heavy material removal tasks reliably, faster, cleaner and with greatly reduced fatigue and injury. Operators love this tool - Try it and see why.

Model 230DM
0.88 hp
0.66 kW



Weight: 32.3 oz / 1.0 kg

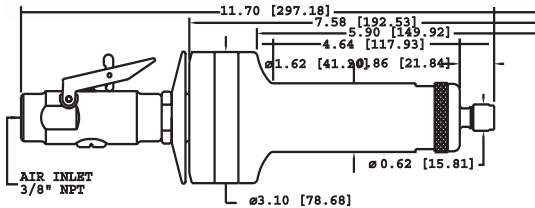

1/4"	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	32722	32728
30,000 rpm	32732	32738
40,000 rpm	32742	32748

6mm	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	32723	32729
30,000 rpm	32733	32739
40,000 rpm	32743	32749

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, rear exhaust, exhaust deflector, trigger switch and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required. **Optional collets page 49.**

General Specifications	230DM		
	CE	USA	MADE IN THE
Speed RPM	25,000	30,000	40,000
Power Rating HP (KW)	.76 (.57)	.83 (.62)	.88 (.66)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	7 (3.30)	7 (3.30)	11.5 (5.43)
Air Consumption-Stall Flow cfm (L/s)	38 (17.94)		
TIR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/4" (6mm)		

Accessories

High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30073
Carbide Burr Set	30063
Mounted Point Set	30061
6' Air Supply Assembly	30012
Carrying Case	11301



Supply is subject to Air Turbine Technology, Inc. (ATT) distributor policies and upon terms contained in ATT'S distributor agreement. Subject to availability, change of specification, price and terms without notice.

TEL: 561-994-0500 FAX: 561-994-8097 email: info@airturbinetools.com